

# BAJA BOSS<sup>®</sup> M/T

## PREMIUM EXTREME MUD-TERRAIN




**POWERPLY<sup>™</sup> XD  
CONSTRUCTION**



**ASYMMETRICAL  
TREAD DESIGN**



**EXTREME  
SIDEBITERS<sup>®</sup>**



**ALL-NEW SILICA  
REINFORCED  
COMPOUND**

- + Asymmetrical tread pattern reduces noise, improves handling and ride
- + Extreme extra large four-pitch Sidebiters<sup>®</sup> for unparalleled off-road traction
- + Powerply<sup>™</sup> XD adds 50% heavier denier cord to the angled third ply providing better puncture resistance, quicker steering response and greater stability
- + Stone ejector ribs prevent gravel from being wedged into tread grooves
- + T4 silica-reinforced compound provides excellent wet handling/braking performance, cut & chip resistance and lasting treadlife
- + Sizes from 15-24 inch wheel diameters for a variety of leveled and lifted vehicles
- + Several sizes with increased load carrying capacity, including load range F
- + Select flotation sizes with reduced loads for lighter duty pickups, SUVs and Jeeps<sup>®</sup>

**LIGHT TRUCK TIRES**




392.22.192.00	22.282
392.22.192.00	22.282
392.22.192.00	22.282
392.22.192.00	22.282

MATERIAL NUMBER	PART #	TIRE SIZE	EQUIVALENT SIZE	LOAD RANGE	SIDE WALL	SERVICE DESC.	(MEAS. RIM WD.) APPD. RIM WIDTH INCHES	MAX. INFL. PSI	MAX. LOAD LBS.*	OVERALL DIAMETER INCHES	SECTION WIDTH INCHES	TREAD WIDTH INCHES	TREAD DEPTH 32NDS	APPROX. WEIGHT LBS.
90000036630	58532	33X12.50R15LT	-	C	BLK	108Q	(10.0) 8.0 - 11.0	35	2,205	32.7	12.2	9.8	21.0	60
90000036631	58552	35X12.50R15LT	-	C	BLK	113Q	(10.0) 8.0 - 11.0	35	2,535	34.6	13.1	10.1	21.0	70
90000036632	58631	LT285/75R16	33X11.50R16LT	E	BLK	126Q	(8.0) 7.5 - 9.5	80	3,750	33.0	11.2	8.8	19.0	63
90000036633	58652	LT315/75R16	35X12.50R16LT	E	BLK	127Q	(8.5) 8.0 - 11.0	65	3,860	34.5	12.6	9.7	20.5	72
90000036634	58731	LT285/70R17	33X11.50R17LT	E	BLK	121Q	(8.5) 7.5 - 9.5	80	3,195	33.0	11.5	9.0	19.0	65
● 90000036635	58739	33X12.50R17LT	-	D	BLK	114Q	(10.0) 8.5 - 11.0	50	2,600	33.0	12.3	10.4	21.0	67
● 90000036636	58732	LT305/65R17	33X12.50R17LT	E	BLK	121Q	(9.0) 8.5 - 11.0	65	3,195	32.7	12.3	9.9	21.0	67
● 90000036652	58759	35X12.50R17LT	-	D	BLK	119Q	(10.0) 8.0 - 11.0	50	3,000	34.8	12.5	10.0	21.0	69
● 90000036653	58752	LT315/70R17	35X12.50R17LT	E	BLK	121Q	(9.5) 8.0 - 11.0	65	3,195	34.6	12.6	10.0	21.0	70
90000036654	58772	37X12.50R17LT	-	D	BLK	124Q	(10.0) 8.0 - 11.0	50	3,525	36.8	13.0	10.2	22.0	78
90000036655	58703	40X13.50R17LT	-	C	BLK	121Q	(11.0) 8.5 - 11.5	35	3,195	39.8	13.6	11.0	22.0	91
90000036637	58831	LT285/65R18	33X11.50R18LT	E	BLK	125Q	(8.5) 8.0 - 10.0	80	3,640	33.4	11.2	9.5	19.0	65
● 90000036638	58839	33X12.50R18LT	-	E	BLK	118Q	(10.0) 8.5 - 11.0	65	2,910	32.7	12.8	10.6	21.0	67
● 90000036639	58832	LT305/60R18	33X12.50R18LT	F	BLK	126Q	(9.0) 8.5 - 11.0	80	3,750	32.7	12.4	10.1	21.0	67
90000036656	58859	35X12.50R18LT	-	D	BLK	118Q	(10.0) 8.5 - 11.0	50	2,910	34.8	12.5	10.1	21.0	73
90000036640	58031	LT285/55R20	33X11.50R20LT	E	BLK	122Q	(9.0) 8.0 - 10.0	80	3,305	32.6	11.7	9.3	18.5	65
● 90000036641	58039	33X12.50R20LT	-	E	BLK	114Q	(10.0) 8.5 - 11.0	65	2,600	32.7	12.2	10.7	21.0	68
90000036658	58032	LT295/55R20	33X12.00R20LT	E	BLK	123Q	(9.5) 8.0 - 10.5	80	3,415	33.1	12.3	10.2	20.0	68
● 90000036642	58034	LT305/55R20	33X12.50R20LT	F	BLK	125Q	(9.5) 8.5 - 11.0	80	3,640	33.5	12.2	10.4	20.5	69
● 90000036643	58033	33X13.50R20LT	-	F	BLK	120Q	(11.0) 9.5 - 12.0	80	3,085	32.6	13.3	11.4	21.0	73
90000036659	58052	35X12.50R20LT	-	F	BLK	125Q	(10.0) 8.5 - 11.0	80	3,640	34.7	12.4	10.2	21.0	72
● 90000033770	58053	35X13.50R20LT	-	F	BLK	126Q	(11.0) 9.5 - 12.0	80	3,750	34.6	13.2	11.1	21.0	81
90000033771	58072	37X12.50R20LT	-	E	BLK	126Q	(10.0) 8.5 - 11.0	65	3,750	36.7	12.6	10.3	21.0	79
● 90000033772	58074	37X14.50R20LT	-	E	BLK	128Q	(11.5) 10.0 - 13.0	65	3,970	36.9	14.5	10.8	21.0	89
● 90000033773	58085	38X15.50R20LT	-	E	BLK	128Q	(12.5) 11.0 - 14.0	65	3,970	37.8	15.4	12.3	21.0	94
90000036644	58232	33X12.50R22LT	-	F	BLK	114Q	(10.0) 8.5 - 11.0	80	2,600	32.7	12.3	10.9	21.0	68
90000033774	58252	35X12.50R22LT	-	F	BLK	121Q	(10.0) 8.5 - 11.0	80	3,195	34.8	12.3	10.4	21.0	76
● 90000033775	58253	LT325/50R22	35X13.00R22LT	F	BLK	127Q	(10.0) 9.0 - 12.0	80	3,860	35.1	12.9	11.4	21.0	80
● 90000033776	58273	37X13.50R22LT	-	F	BLK	128Q	(11.0) 8.5 - 12.0	80	3,970	36.9	13.4	10.8	21.0	82
● 90000033777	58285	38X15.50R22LT	-	E	BLK	128Q	(12.5) 11.0 - 14.0	65	3,970	37.8	15.5	12.3	21.0	94
● 90000033778	58474	37X14.50R24LT	-	F	BLK	125Q	(11.5) 10.0 - 13.0	80	3,640	37.0	14.1	10.8	21.0	88
● 90000033779	58485	38X15.50R24LT	-	F	BLK	128Q	(12.5) 11.0 - 14.0	80	3,970	38.0	14.9	12.3	21.0	95

\*MAX LOAD DATA IS FOR SINGLE REAR TIRE APPLICATIONS


- = INCREASED-LOAD LT-METRIC OPTIONS FOR HEAVY DUTY APPLICATIONS
- = LOWER-LOAD FLOTATION OPTIONS FOR JEEPS, 1/2-TONS & OFF-ROAD
- = APPROVED FOR THE INCREASING POPULAR 12" AND/OR 14" WIDE WHEELS



PROGRAMM\_2/02


PS.PROG 0821 1414. B(b) Mr. II  
CT. U8 0.4  
M (D2\_OP) 1.2 2.3

POWERPLY XD CONSTRUCTION

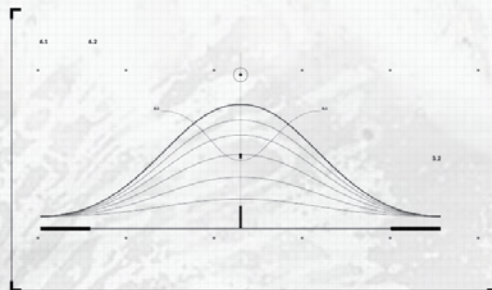

GR. DAG. 28.3

INFORCED TREAD COMPOUND

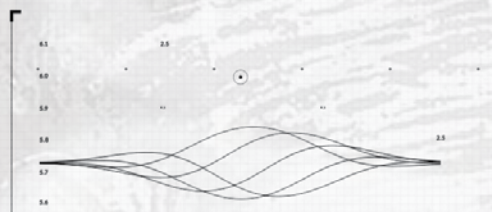

TIRE STATS:

TEH #02\_D(2)

392.22.192.00	22.282
392.22.192.00	22.282
392.22.192.00	22.282
392.22.192.00	22.282
392.22.192.00	22.282

DATA BE USED: RATED IN (R) - 300MM (12) MM  
IN (2) MM (3/32) 4.0 2.2002  
OF (2) MM (3/32) 4.0 2.2002

DATA BE USED: RATED IN (R) - 300MM (12) MM  
IN (2) MM (3/32) 4.0 2.2002  
OF (2) MM (3/32) 4.0 2.2002

DATA BE USED: RATED IN (R) - 300MM (12) MM  
IN (2) MM (3/32) 4.0 2.2002  
OF (2) MM (3/32) 4.0 2.2002

DATA BE USED: RATED IN (R) - 300MM (12) MM  
IN (2) MM (3/32) 4.0 2.2002  
OF (2) MM (3/32) 4.0 2.2002

MED # 101

EMULJET REF 11-01-012